


5-11. Body

1. Body Alignment


The body alignment should be measured by using a tracking gauge or other similar device. When using a tape measure, take extra care not to make a measurement error due to a deflected or twisted tape.

The measurement between a pair of reference points is the straight distance between the centers of the reference points (actual size). The respective reference points are symmetrical with the center line of the body.

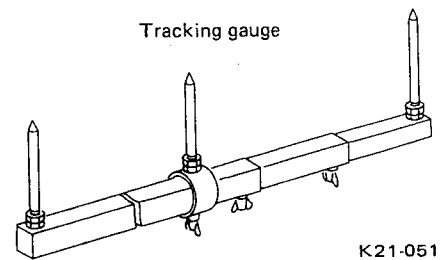

K21-051

Fig. 5-11-1

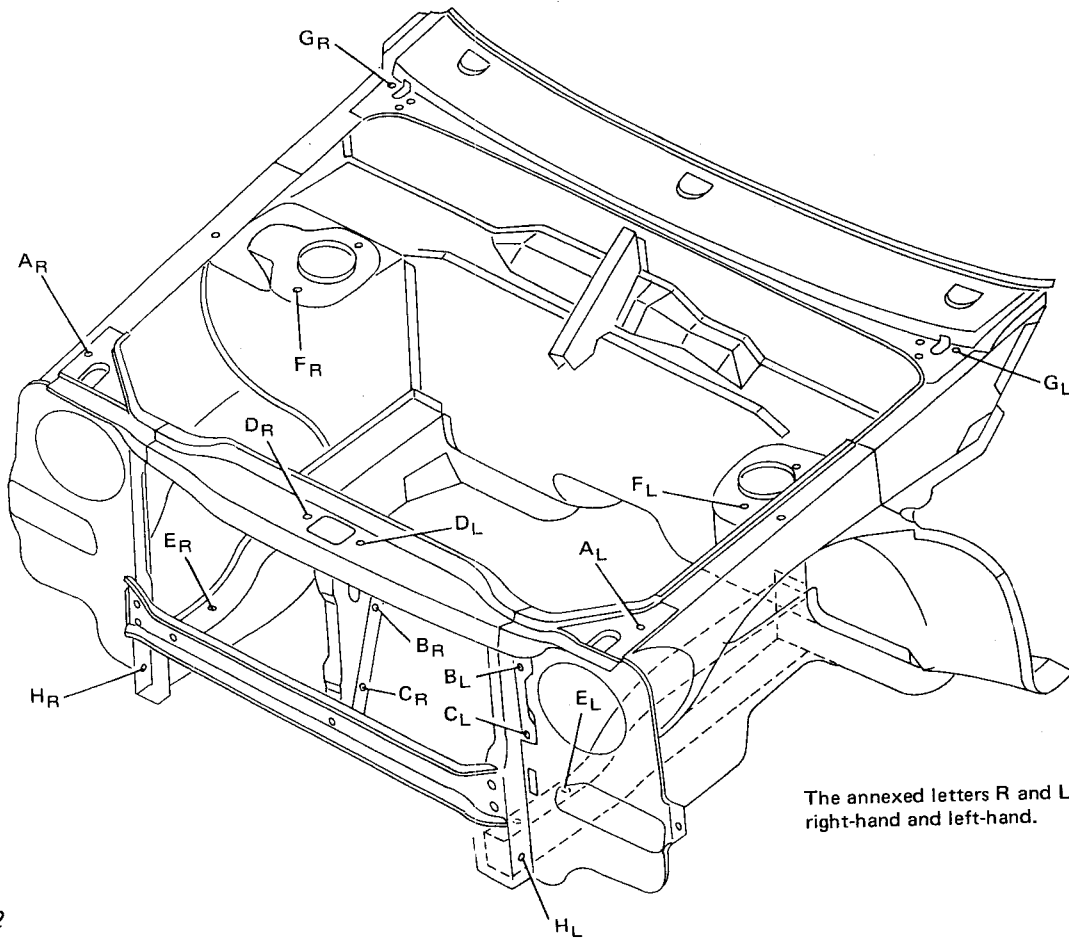

The annexed letters R and L indicate right-hand and left-hand.

K21-052

Fig. 5-11-2

- A_R, A_L Fender fitting holes (symmetrical)
- B_R, B_L Radiator fitting holes (asymmetrical)
- C_R, C_L Radiator fitting holes (asymmetrical)
- D_R, D_L Hood lock fitting hole (asymmetrical)
- E_R, E_L Front crossmember rear fitting holes (symmetrical)
- F_R, F_L Strut mount front fitting holes (symmetrical)
- G_R, G_L Fender fitting holes (symmetrical)
- H_R, H_L Front skirt fitting holes (symmetrical)

Body

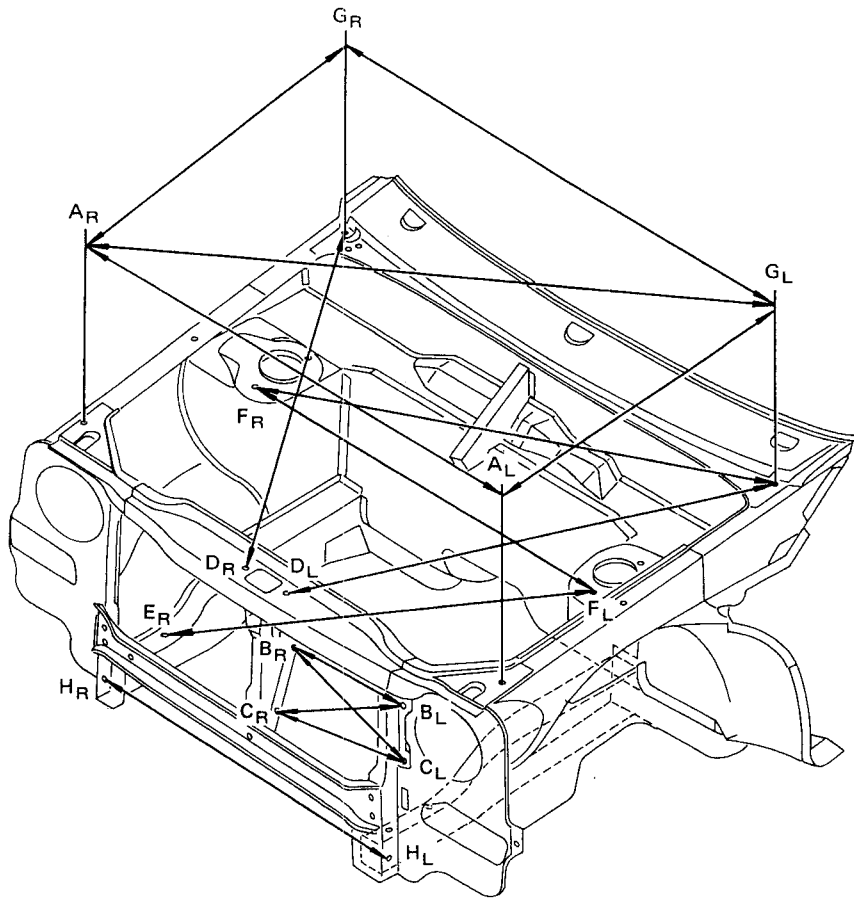


Fig. 5-11-3

K21-053

Unit: mm (in)


A _R -G _R A _L -G _L	A _R -A _L G _R -G _L	A _R -G _L A _L -G _R	B _R -B _L	C _R -C _L	B _R -C _L	B _L -C _R	B _R -C _R
535 (21.06)	1,146 (45.12)	1,265 (49.80)	374 (14.72)	376 (14.80)	385 (15.16)	407 (16.02)	142 (5.59)

B _L -C _L	F _R -G _L F _L -G _R	F _R -F _L	E _R -F _L E _L -F _R	D _R -G _R	D _L -G _L	H _R -H _L
117 (4.61)	1,058 (41.65)	892 (35.12)	927 (36.50)	801 (31.54)	796 (31.34)	827 (32.56)

NOTE:

The size shows the straight distance (actual size) between the centers of the holes.

Body

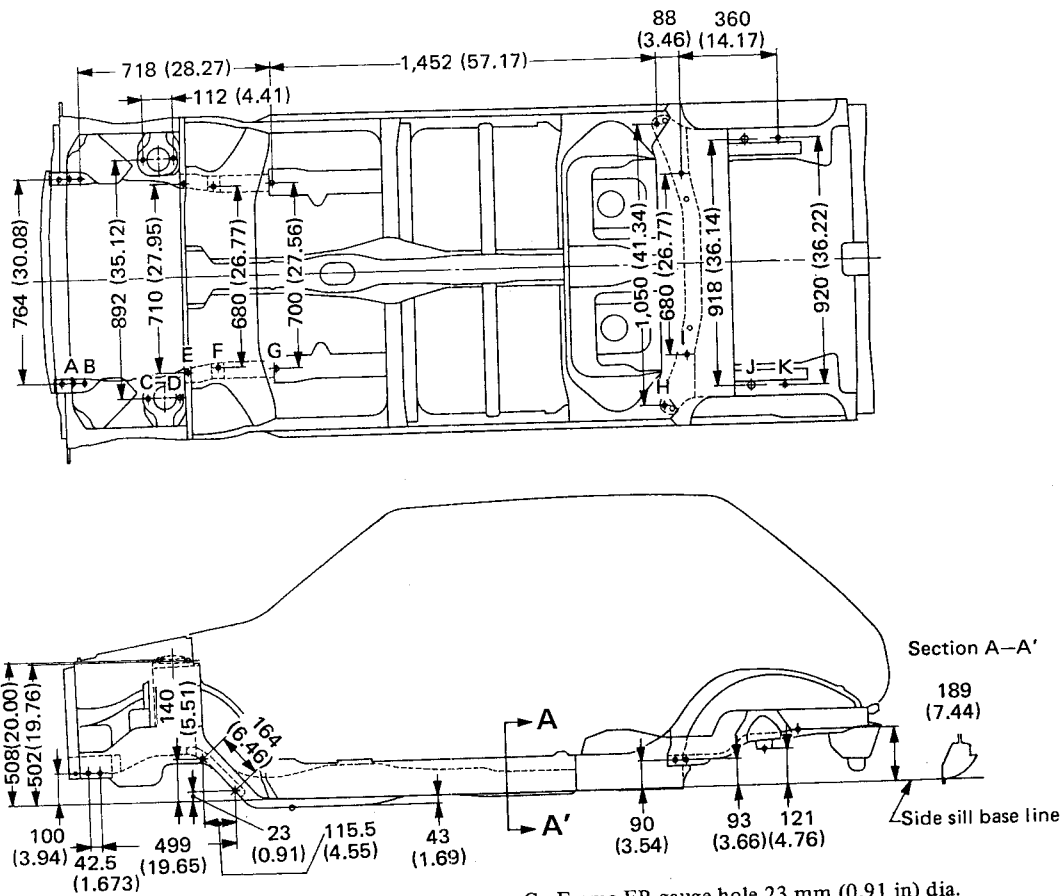


- A Frame FF gauge hole 15 mm (0.59 in) dia.
- B Front crossmember fitting hole 11 mm (0.43 in) dia.
- C Strut fitting bolt hole 12 mm (0.47 in) dia.
- D Strut fitting bolt hole 12 mm (0.47 in) dia.
- E Rear crossmember fitting bolt hole M10
- F Rear crossmember fitting bolt hole M10

- G Frame FR gauge hole 23 mm (0.91 in) dia.
- H Rear trailing arm fitting bolt hole M10
- I Rear crossmember gauge hole 23 mm (0.91 in) dia.
- J Helper gauge hole 6 mm (0.24 in) dia.
- K Frame rear floor gauge hole 23 mm (0.91 in) dia.

Unit: mm (in)

K21-054

Fig. 5-11-4

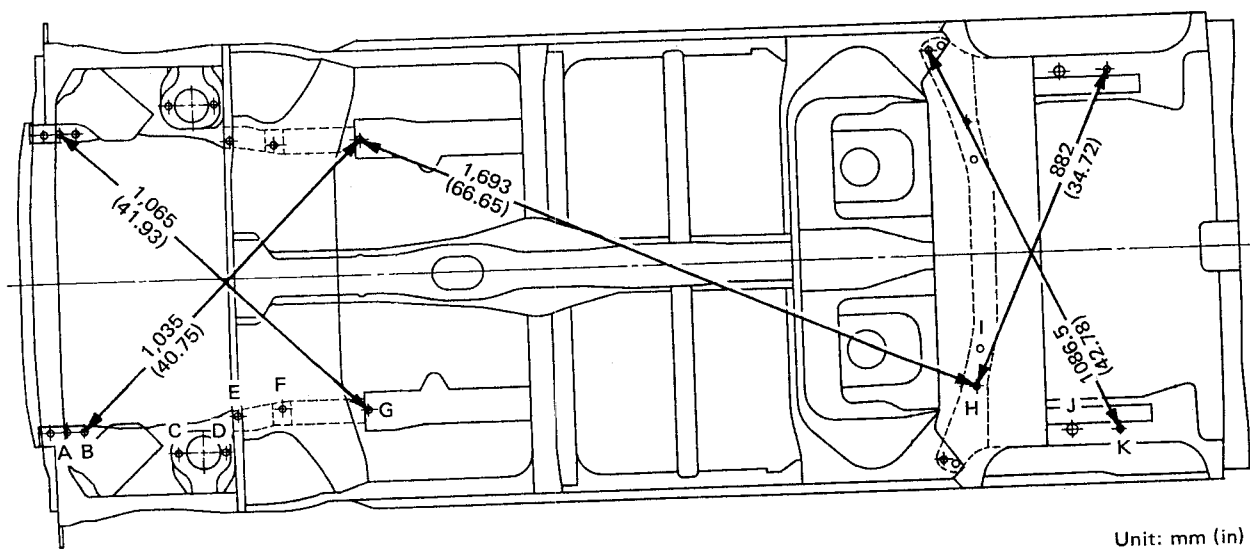

Unit: mm (in)

K21-063

Fig. 5-11-5

Body

Size of front window


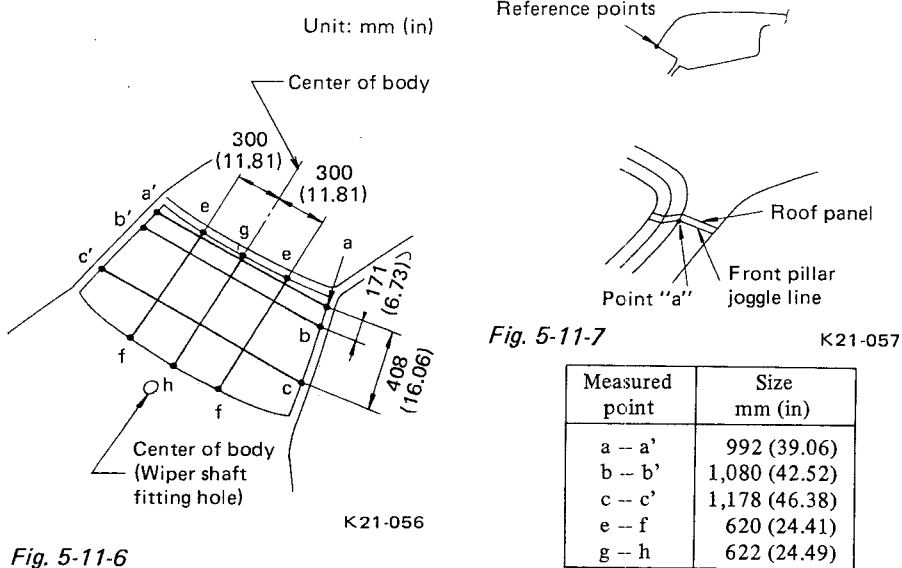


Fig. 5-11-6

3-door Sedan

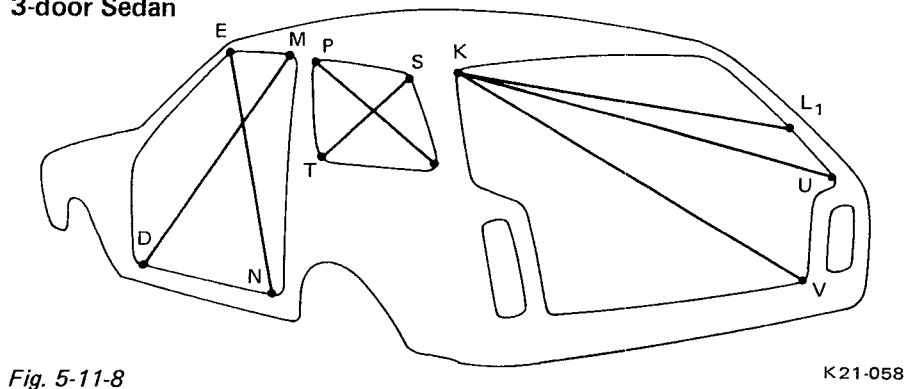

Measured point	Size mm (in)
M - D	1,349 (53.11)
E - N	995 (39.17)
P - R	751 (29.57)
S - T	566 (22.28)
K - L ₁	1,137 (44.76)
K - U	1,207 (47.52)
K - V	1,292 (50.87)






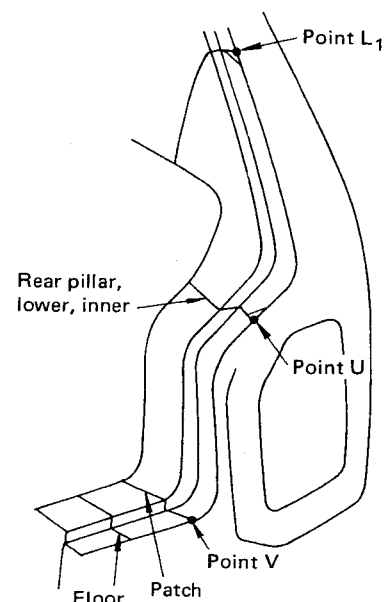


Fig. 5-11-9


K21-059

5-door Sedan

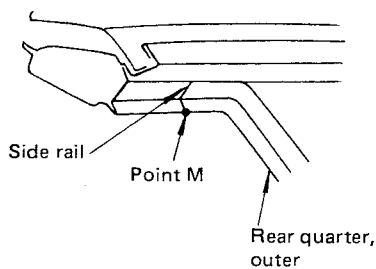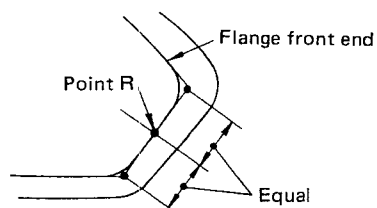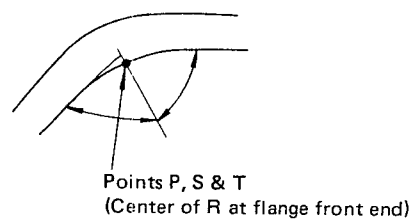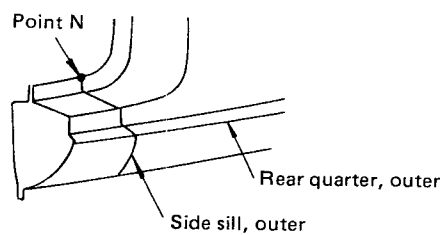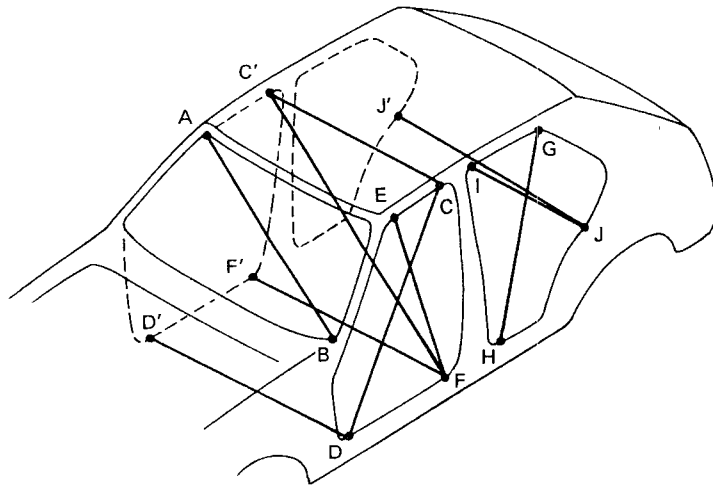

K21-060











Fig. 5-11-10

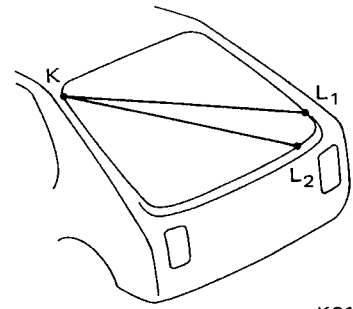

K21-061

Fig. 5-11-11

Measured point	Size mm (in)
A - B	1,185 (46.65)
C - D	1,250 (49.21)
C - C'	964 (37.95)
D - D'	1,198 (47.17)
E - F	914 (35.98)
F - F'	1,198 (47.17)
G - H	1,045 (41.14)
I - J	871 (34.29)
J - J'	1,198 (47.17)
K - L ₁	1,137 (44.76)
K - L ₂	1,172 (46.14)

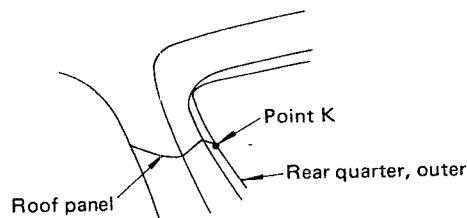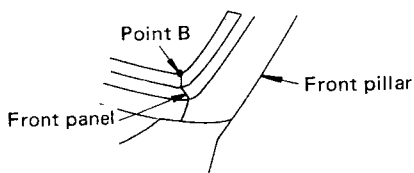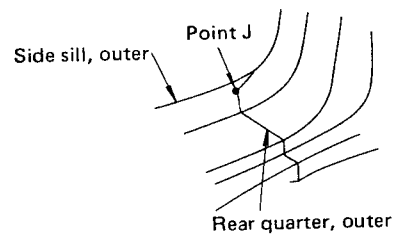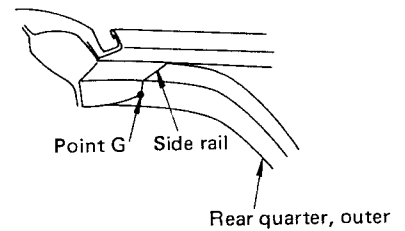

K21-062

Fig. 5-11-12

Body

2. Body Component Parts

1. Front Structure

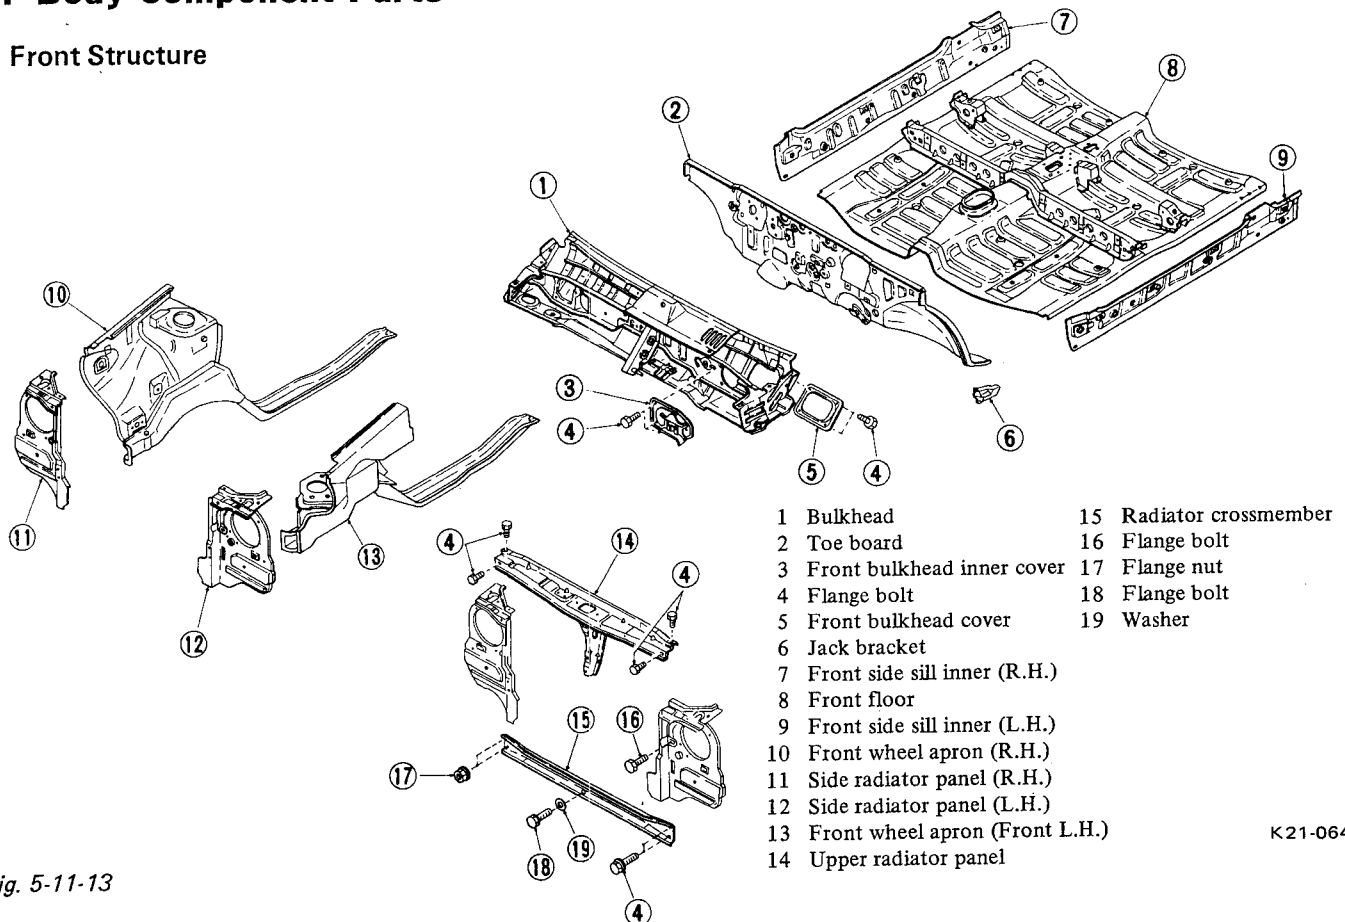


Fig. 5-11-13

2. Side Structure

3-door Sedan


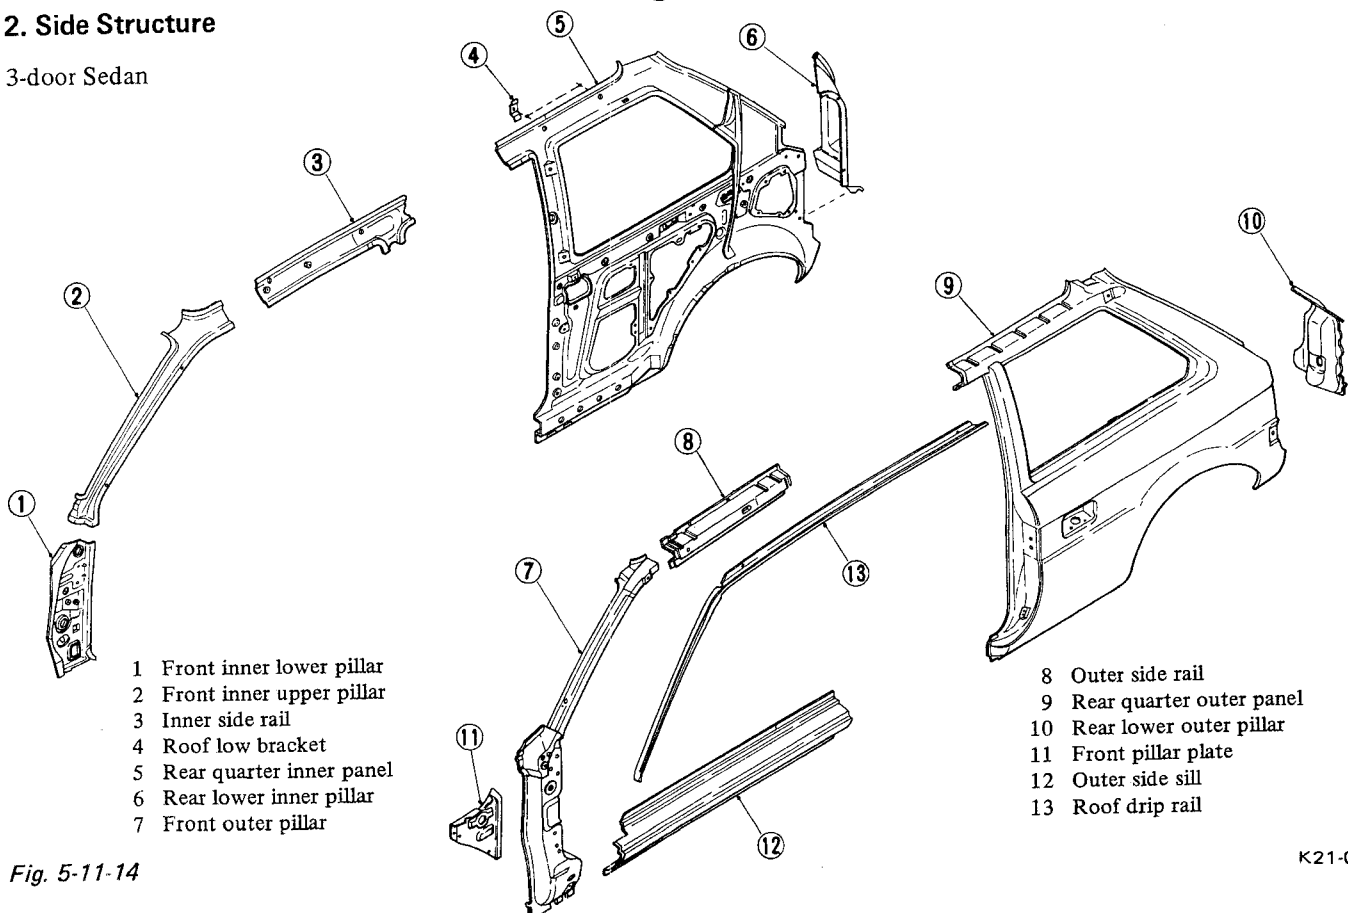


Fig. 5-11-14

Body

5-door Sedan

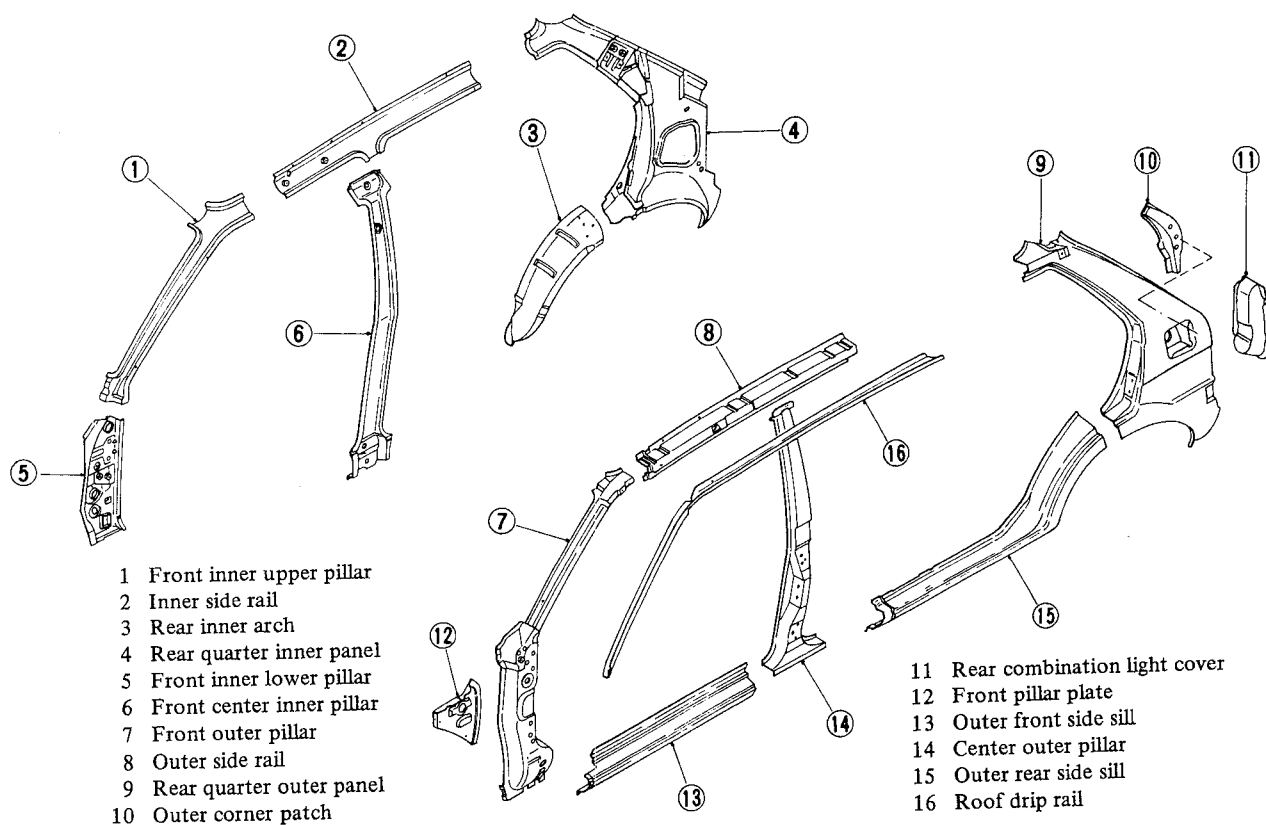


- 1 Front inner upper pillar
- 2 Inner side rail
- 3 Rear inner arch
- 4 Rear quarter inner panel
- 5 Front inner lower pillar
- 6 Front center inner pillar
- 7 Front outer pillar
- 8 Outer side rail
- 9 Rear quarter outer panel
- 10 Outer corner patch

- 11 Rear combination light cover
- 12 Front pillar plate
- 13 Outer front side sill
- 14 Center outer pillar
- 15 Outer rear side sill
- 16 Roof drip rail

Fig. 5-11-15

K21-067

3. Floor

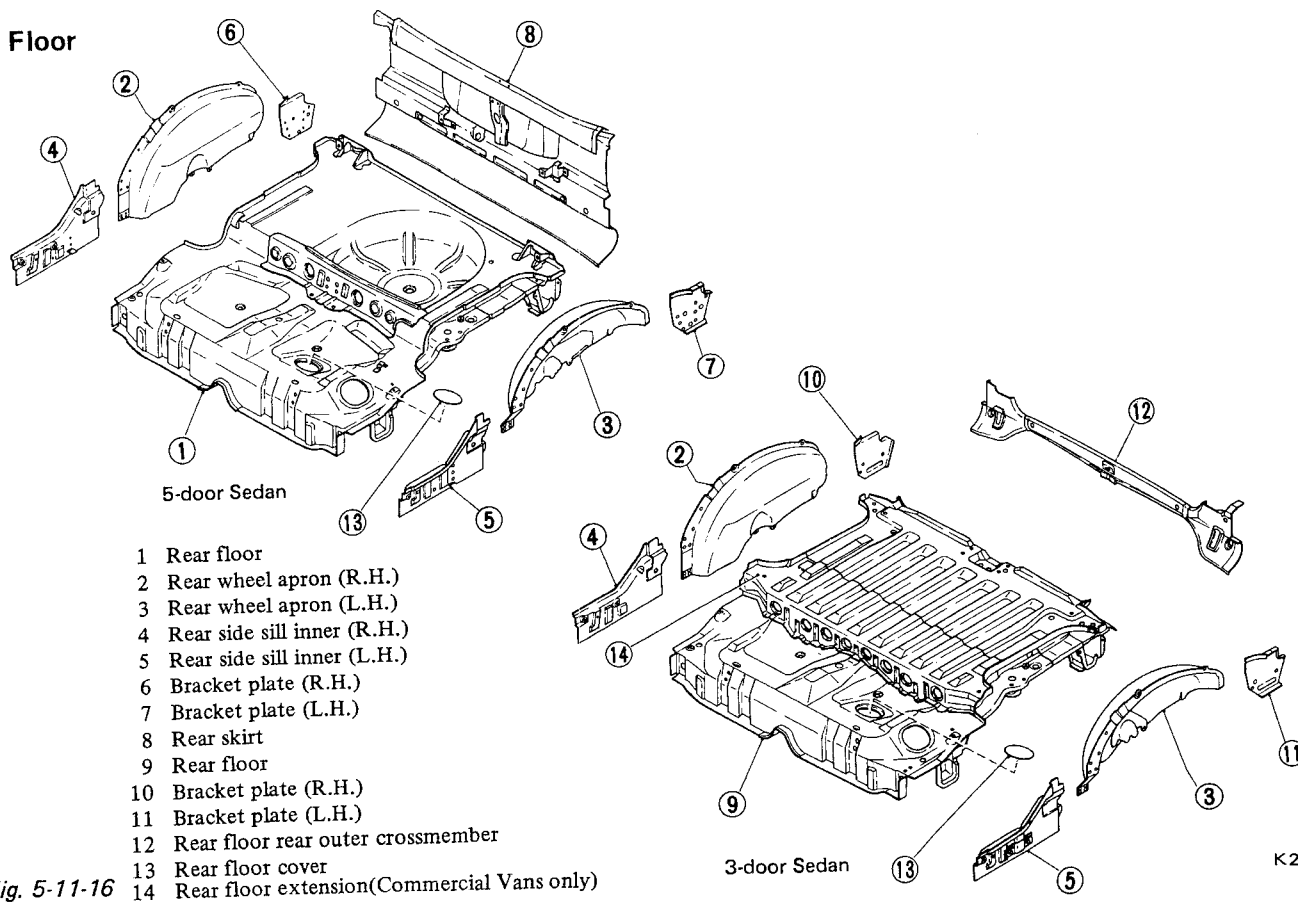

- 1 Rear floor
- 2 Rear wheel apron (R.H.)
- 3 Rear wheel apron (L.H.)
- 4 Rear side sill inner (R.H.)
- 5 Rear side sill inner (L.H.)
- 6 Bracket plate (R.H.)
- 7 Bracket plate (L.H.)
- 8 Rear skirt
- 9 Rear floor
- 10 Bracket plate (R.H.)
- 11 Bracket plate (L.H.)
- 12 Rear floor rear outer crossmember
- 13 Rear floor cover
- 14 Rear floor extension(Commercial Vans only)

Fig. 5-11-16

K21-065